## GENERATION LIGHTING

### Wall

### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

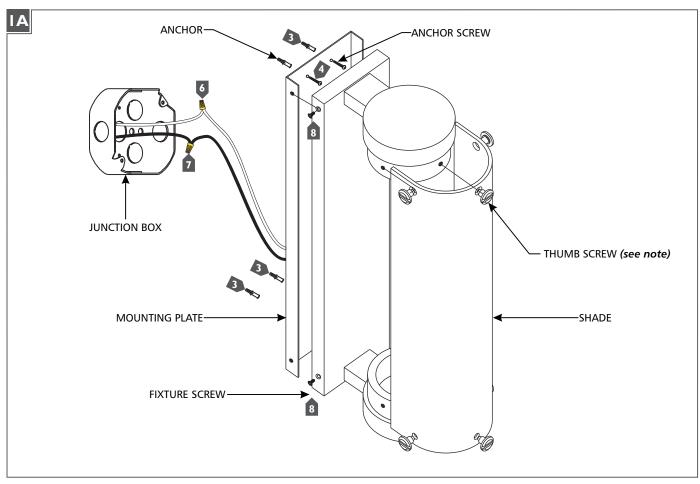

- Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor locations through the holes on the mounting plate, then remove the mounting plate from the junction box.
- 3 Drill appropriate sized holes at the marked points and install the anchors.
- 4 Secure the mounting plate to the junction box and screw the anchors screws into the anchors.
- 5 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire to the neutral power line wire with a wire nut.
- Connect the black fixture wire to the hot power line wire with a wire nut.
- Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 9 Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.
- Align the shade holes with the fixture holes and secure the shade in place by screwing in the thumb screws beginning with the side screws. NOTE: Side screws must be installed first, then the center screws for proper installation.

# **SAVETHESE INSTRUCTIONS!**

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

# www. generation lighting. com

© 2019 Generation Lighting All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.