

# Traverse Mirage

14916RD | 1.1

## GENERATION LIGHTING

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

### GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.

This instruction shows a typical installation.


## GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347


[www.visualcomfort.com](http://www.visualcomfort.com)

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

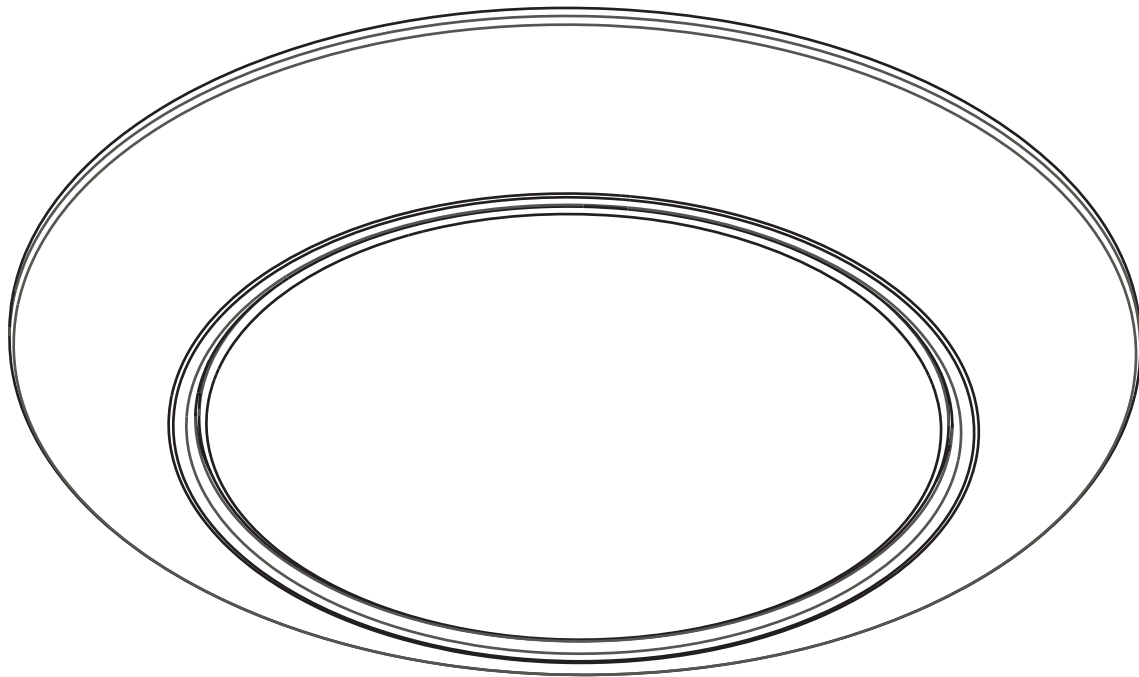

**SAVE THESE INSTRUCTIONS!**

## Install the Fixture

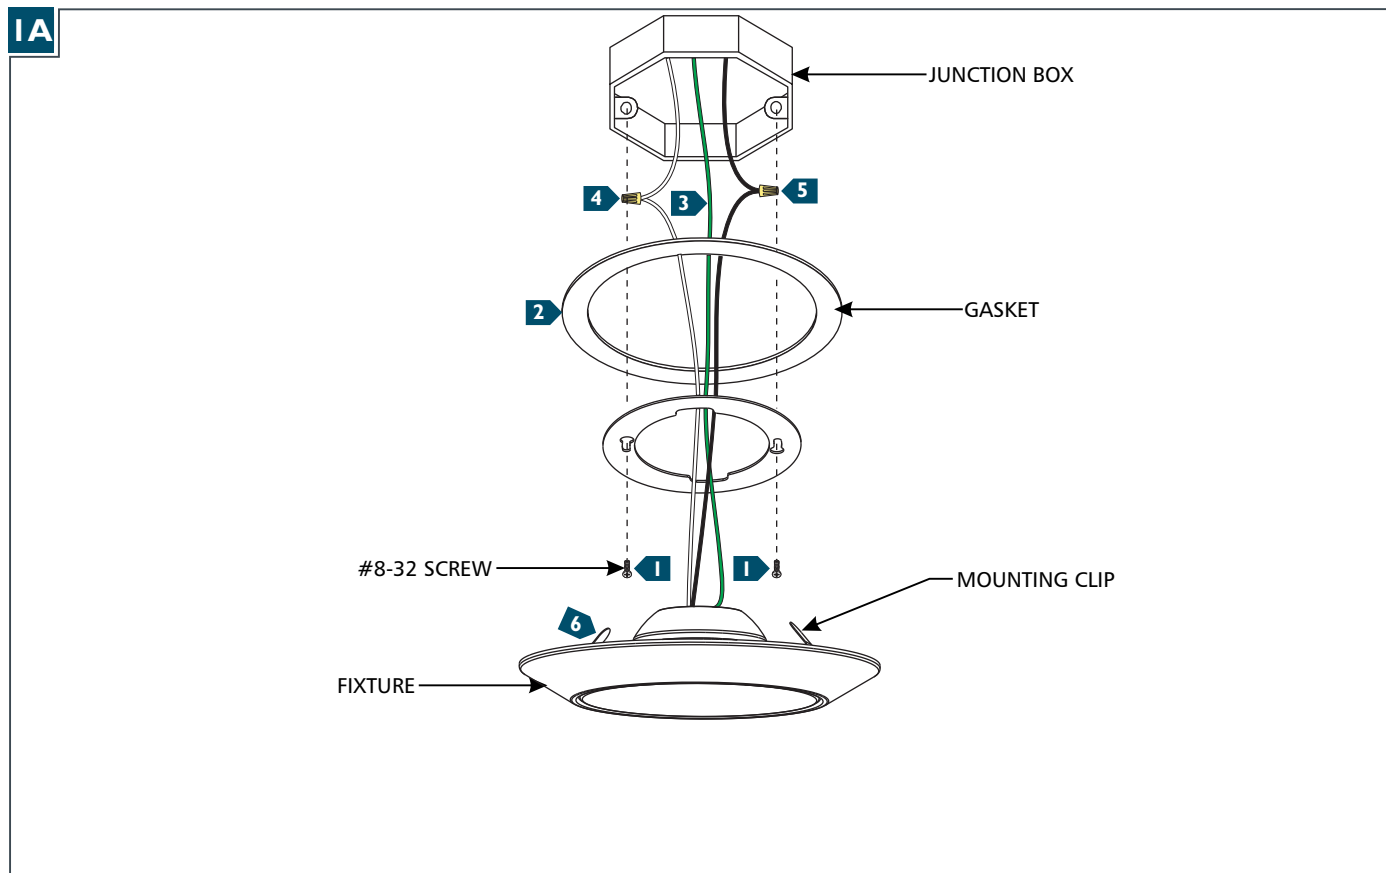

- 1** Place the mounting plate slots over the screws. Rotate and hold the mounting plate while tightening the screws.  
**Note:** Do not over tighten screws as it may bend the mounting plate and cause the fixture to not sit flush.
- 2** For Wet Locations, install the foam gasket onto the back of the fixture.
- 3** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 4** Connect the white fixture wire to the neutral power line wire with a wire nut.
- 5** Connect the black fixture wire to the hot power line wire with a wire nut.
- 6** Align the mounting clips on the fixture to the hinges on the mounting plate, then push the fixture flush against the ceiling.