

TRAVERSE LUCARNE NICHE

LED FIXED DOWNLIGHT

The Lucarne LED Niche lights combine a compact size with advanced LEDs to provide superior quality light. This fixed downlight features 90 CRI in white or antique bronze finishes, 2700K or 3000K CCTs, and can be had in either 12 or 24 volts. For added flexibility, each light ships with both a 30° and 65° beam spread lens included so you can adjust as needed during installation or easily reconfigure at a later date.

- 90 CRI, 300 Lumens while only requiring 5.5-Watts to power
- Complies with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019)
- Versatile accent light for residential and commercial spaces
- Dimmable. J-Box mounted; Fixture may be mounted to wall or ceiling
- Wet-rated, High-efficiency LEDs; 50,000 life hours

SPECIFICATIONS

DELIVERED LUMENS	300
WATTS	5.5
EFFICACY	55
CRI	90+
CCT	2700K or 3000K
COLOR CONSISTENCY	3-Step
INPUT VOLTAGE	12V or 24V
DIMMING ¹	10%
OPTICS	30° or 65° (both included)
CONSTRUCTION	Housing: Steel/Aluminum
FINISH	White or Bronze
GENERAL LISTINGS	ETL Listed. Wet-rated.
WIRING	6.5" j-box mounted
CALIFORNIA TITLE 24	Registered CEC Appliance Database. Complies with CEC 2019 Title 24 Part 6 (JA8-2016, JA8-2019).
L70	50,000 hours min
WARRANTY ²	5 years

¹See visualcomfort.com for dimmer compatibility.



²Visit visualcomfort.com for specific warranty limitations and details.



ROUND FIXED WHITE



ROUND FIXED BRONZE

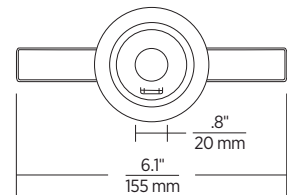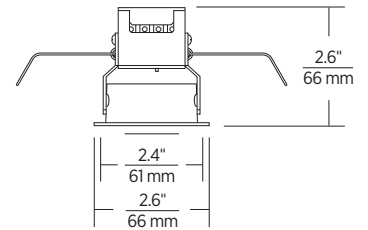

ORDERING INFORMATION

FIXTURE

PRODUCT

95411S-15	LUCERNE NICHE ROUND, FIXED 2700K, 12V, WHITE
95511S-15	LUCERNE NICHE ROUND, FIXED 2700K, 24V, WHITE
95511S-171	LUCERNE NICHE ROUND, FIXED 2700K, 24V, BRONZE
95412S-15	LUCERNE NICHE ROUND, FIXED 3000K, 12V, WHITE
95412S-171	LUCERNE NICHE ROUND, FIXED 3000K, 12V, BRONZE
95512S-15	LUCERNE NICHE ROUND, FIXED 3000K, 24V, WHITE
95512S-171	LUCERNE NICHE ROUND, FIXED 3000K, 24V, BRONZE
95620	ROMEX CONNECTOR ¹



Romex Connector
Used in lieu of existing cap on top of Lucarne Niche lights for Romex and MC connectors.

¹ - Romex Connector is used in lieu of existing cap on top of Lucarne Niche Lights for Romex and MC Connections.

TRAVERSE LUCARNE NICHE

LED FIXED DOWNLIGHT

REMOTE POWER SUPPLIES

POWER SUPPLY	ITEM NUMBER	MINIMUM ¹ DIMMING LEVEL	FEATURES
ZERO-LOAD ELECTRONIC			
	75W: 96623S-12 7.81"L x 1.36"W x 0.95"H	10%	<ul style="list-style-type: none"> • 120V input voltage: 24VDC output voltage • Max Run: 35ft • Damp rated
	75W: 96622S-12 7.81"L x 1.36"W x 0.95"H	10%	<ul style="list-style-type: none"> • 120V input voltage: 12VDC output voltage • Max Run: 35ft • Damp rated
	150W: 96624S-12 8.38"L x 2.53"W x 1.22"H	10%	<ul style="list-style-type: none"> • 120V input voltage: 12VDC output voltage • Max Run: 35ft • Damp rated
MAGNETIC			
	250W: 94461-12 10.75"L x 4.5"W x 4.25"H	10%	<ul style="list-style-type: none"> • 120V input voltage: 24VDC output voltage • Max Run: 35ft • Dry rated

¹Minimum dimming levels vary by dimmer. For more information, reference the ESSENCE architectural light channels and LED tape dimmer compatibility chart available for download on visualcomfort.com.

