

Kosa 18 Ceiling

700FMKOSA18_ 1.2

VISUAL COMFORT & Co.

MODERN COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

This product can be dimmed with most ELV or TRIAC dimmers.

This instruction shows a typical installation.




CAUTION - RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

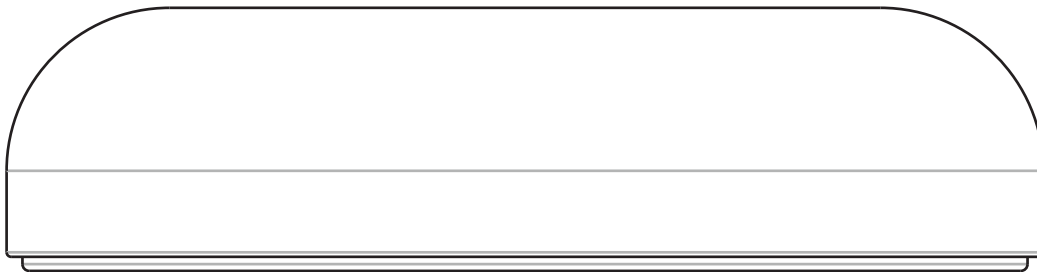

Install the Fixture

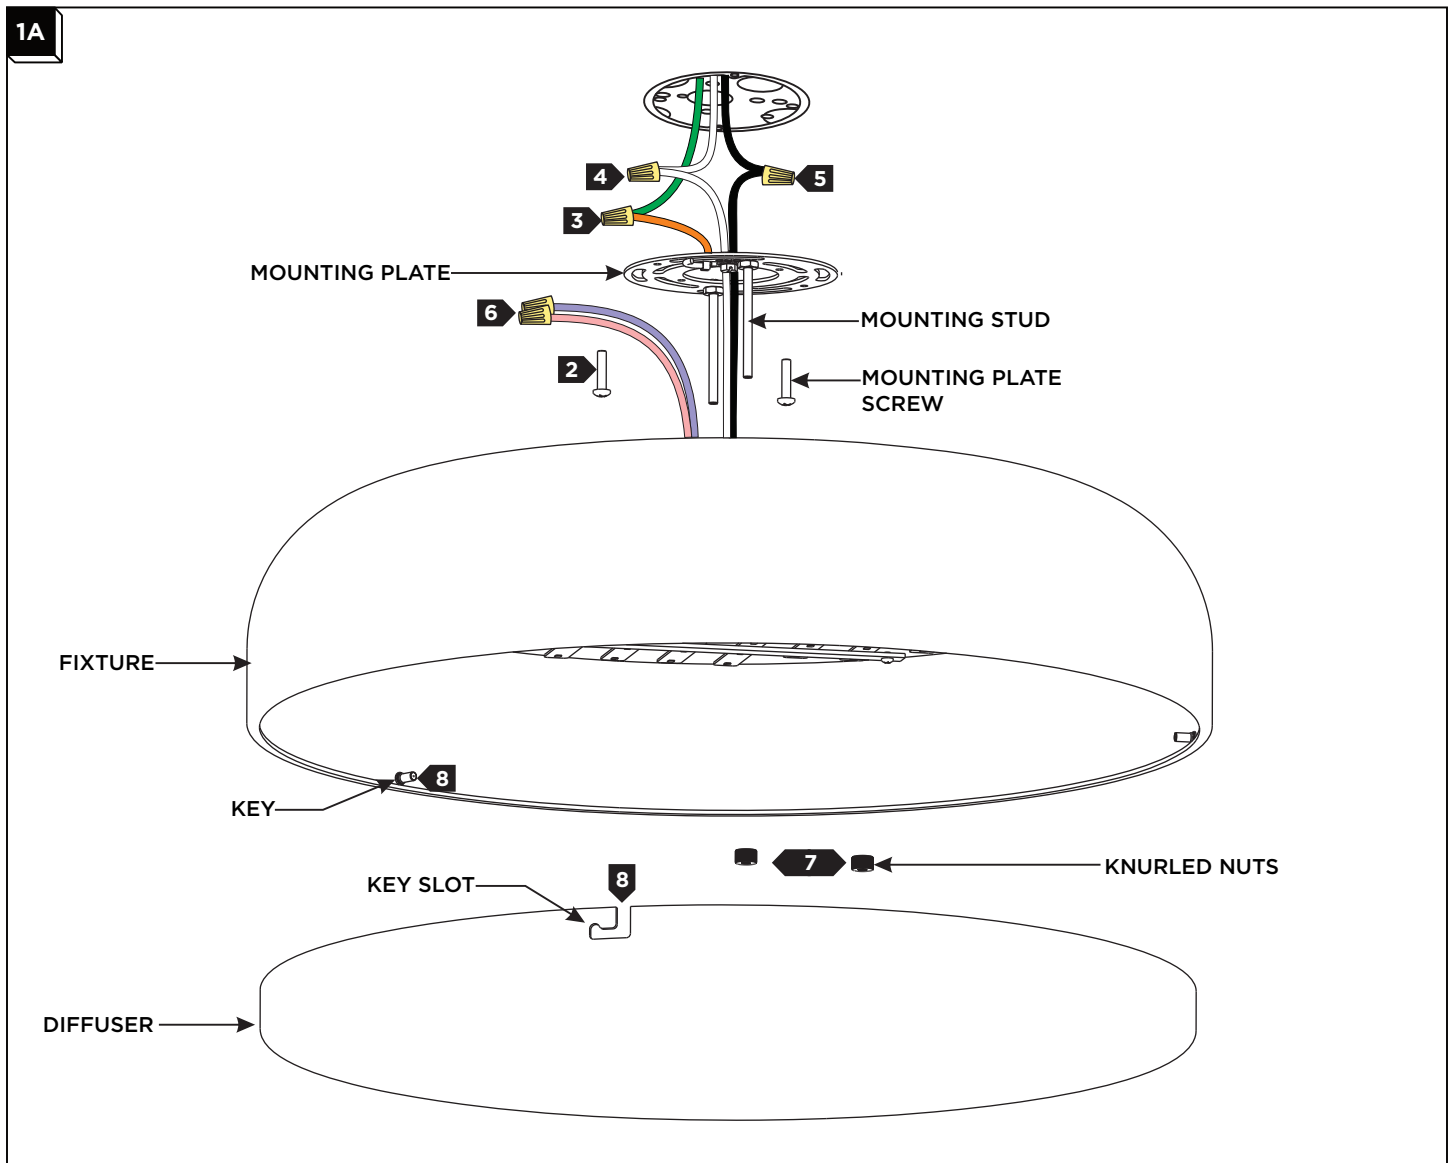

- 1 Separate the mounting plate from the fixture by removing the knurled nuts.
- 2 Install the mounting plate to the junction box with the provided #8-32 screws.
- 3 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 4 Connect the white fixture wire to the neutral power line with a wire nut.
- 5 Connect the black fixture wire to the hot power line with a wire nut.
- 6 For 0-10V Dimming, use the purple and pink wires to connect to a compatible dimmer. If not using 0-10V dimming, make sure to cap off these wires. **CAUTION: Consult with the dimmer manufacturer and verify that the dimmer can be used with a driver that has 0-10V control wires that are not isolated from primary circuits.**
- 7 Properly place the wires and wire nut connections into the junction box and install the fixture by aligning the holes to the mounting studs on the mounting plate. Secure it place with the knurled nuts.
- 8 Align the key slots on the diffuser to the keys on the fixture, push the diffuser onto the keys, and rotate it to lock it in place.