

# Kulma Pendant

7000PKLM\_

1.1

## VISUAL COMFORT & Co.

MODERN COLLECTION

### GENERAL PRODUCT INFORMATION:



This product is suitable for outdoor locations.

Dimmable with most LED compatible ELV, TRIAC, and 0-10V dimmers.


This instruction shows a typical installation.

### CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Use minimum 90°C supply conductors.**

**SAVE THESE INSTRUCTIONS!**

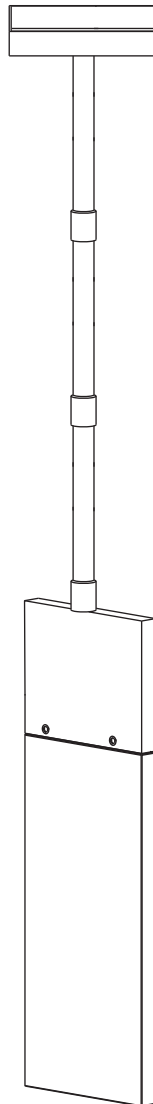

VISUAL COMFORT & Co.

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

1A

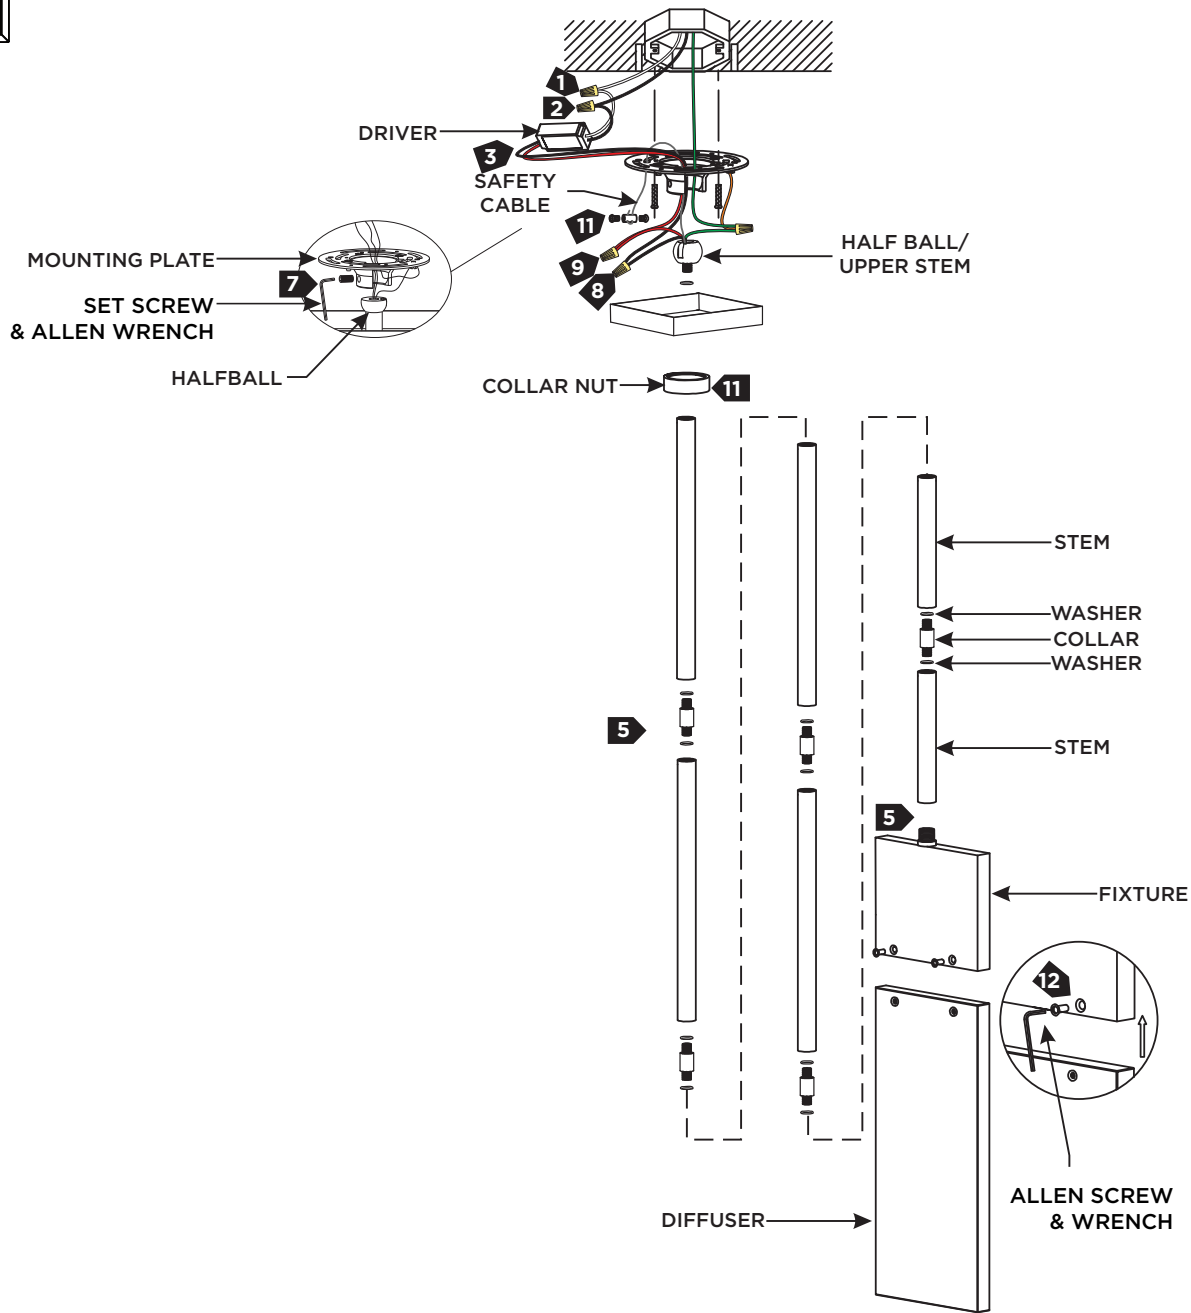

- 1 Connect the white input driver wire to the neutral power line wire with a wire nut.
- 2 Connect the black input driver wire to the hot power line wire with a wire nut.
- 3 Place the driver into the junction box, make sure the driver output wires are accessible and install the mounting plate to the junction box with the two provided #8-32 screws.
- 4 Slide the canopy, then the collar nut onto the half ball/stem assembly
- 5 Determine the desired height of the fixture using the provided stems, collars, washers, and half ball/upper stem. Feed the fixture wires through each section stem assembly, screwing the sections together as each piece is added. Once the desired height is reached screw the entire stem assembly to the top of the fixture. **NOTE: For outdoor applications, please apply Loctite to the threads of the stems at installation to reduce risk of wind rotating the fixture.**
- 6 Seat the half ball into the mounting plate ensuring no wires are being pinched. Tighten the set screw using the provided Allen wrench to fully secure the half ball in place.
- 7 Connect the black fixture wire to the negative (-) output driver wire with a wire nut.
- 8 Connect the red fixture wire to the positive (+) output driver wire with a wire nut.
- 9 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 10 Shorten the safety cable if necessary, by pulling it through the strain relief and secure it by tightening the two screws.
- 11 Neatly place the remaining wire nut connections inside the junction box/canopy, then slide the canopy up over the mounting plate and secure in place with the collar nut.
- 12 Install the diffuser to the fixture and secure it in place with the Allen screws using the provided Allen wrench.