

**Seville Wall**

4120201, 4420202, 4420203, 4420204, 4420205 | I.1

**GENERATION LIGHTING****GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

This instruction shows a typical installation.

**CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

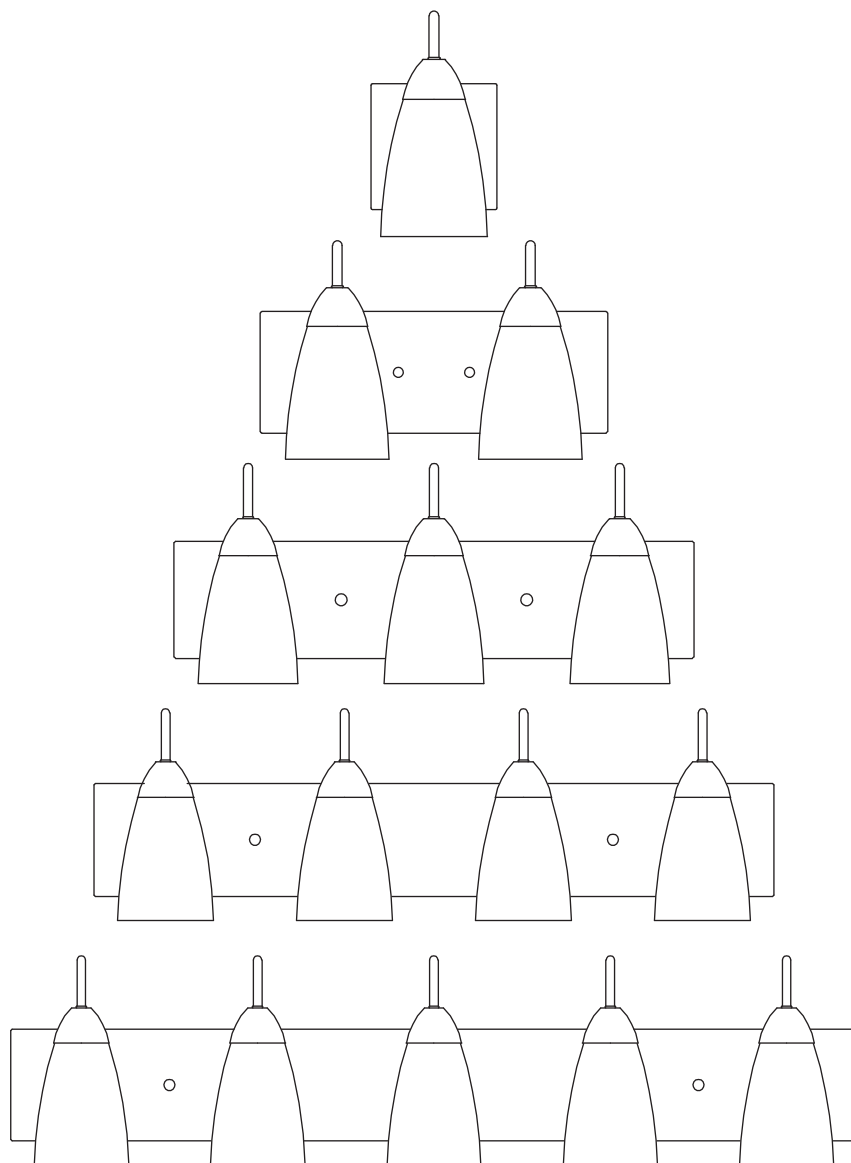**SAVE THESE INSTRUCTIONS!****GENERATION LIGHTING**

7400 Linder Ave., Skokie, IL 60077


T 847.410.4400 | F

847.410.4500

[www.visualcomfort.com](http://www.visualcomfort.com)

# Install the Fixture

1A

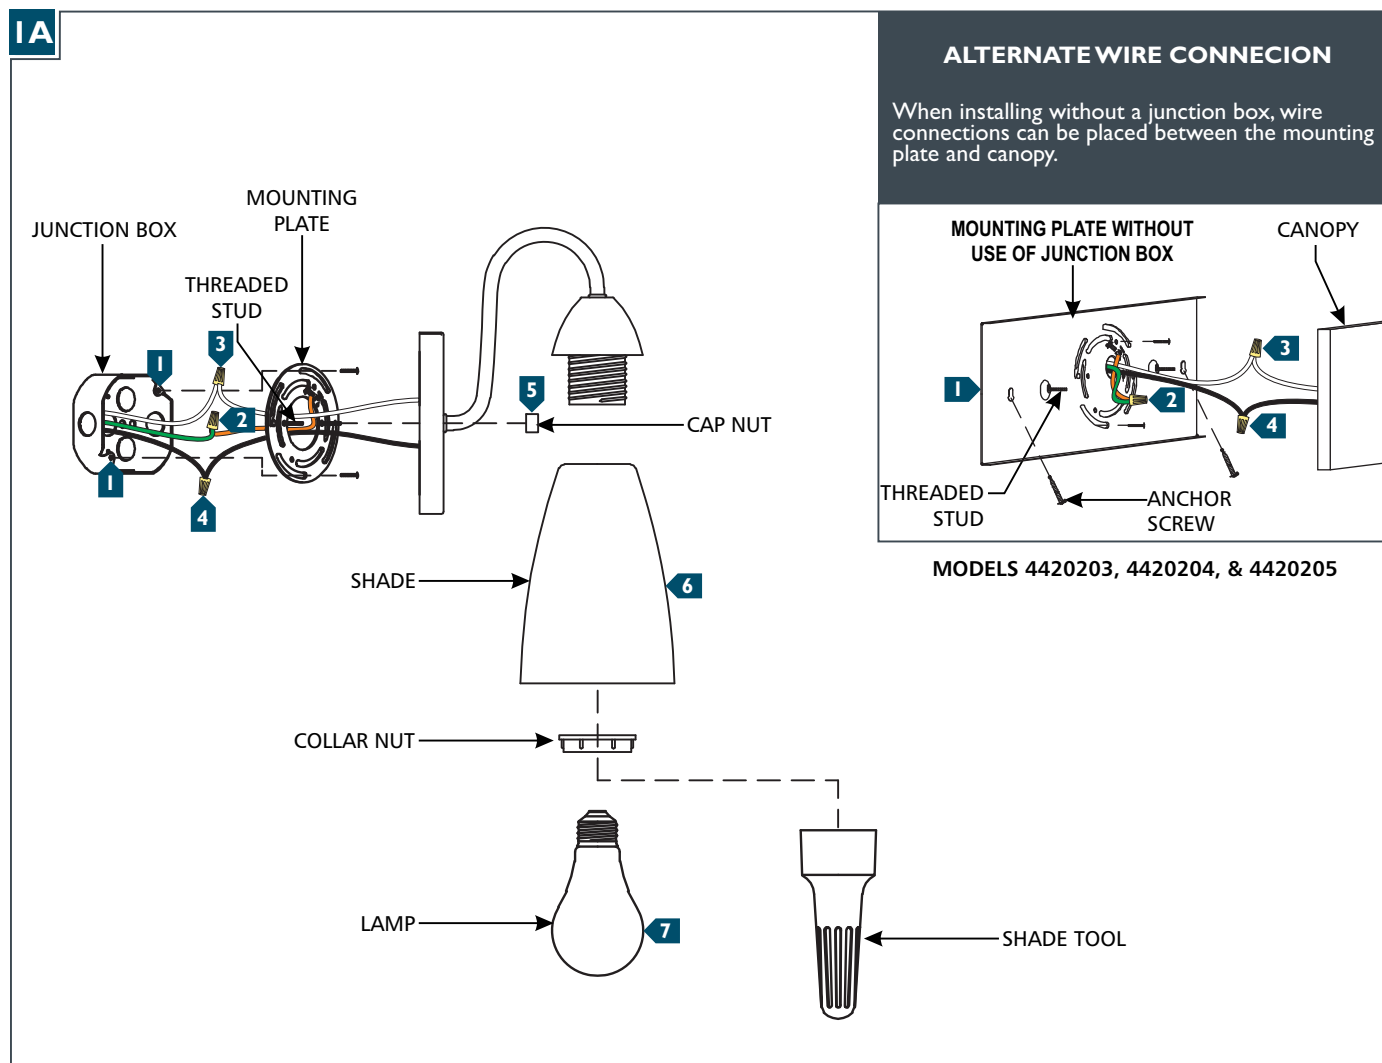

- 1 Secure the mounting plate to the junction box or wall. If applicable, properly anchor the mounting plate.
- 2 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- 5 Neatly place the wires into the junction box, mount the fixture base onto the threaded stud(s), and secure it with the cap nut(s).
- 6 Install the shade by placing it onto the socket and secure in place by screwing the collar nut onto the socket using the shade tool. Repeat for remaining shades.
- 7 Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.