Alban Outdoor Wall

GENERATION LIGHTING

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes

This product is safety listed for wet locations.


This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


SAVE THESE INSTRUCTIONS!

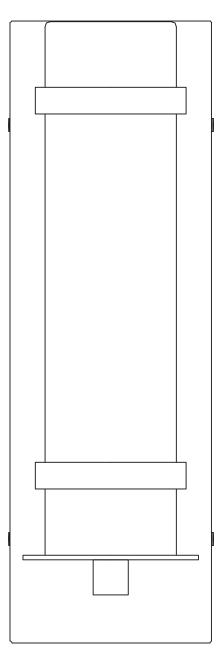

GENERATION LIGHTING

7400 Linder Ave., Skokie, IL 60077 T 847.410.4400 | F 847.410.4500

Install the Fixture

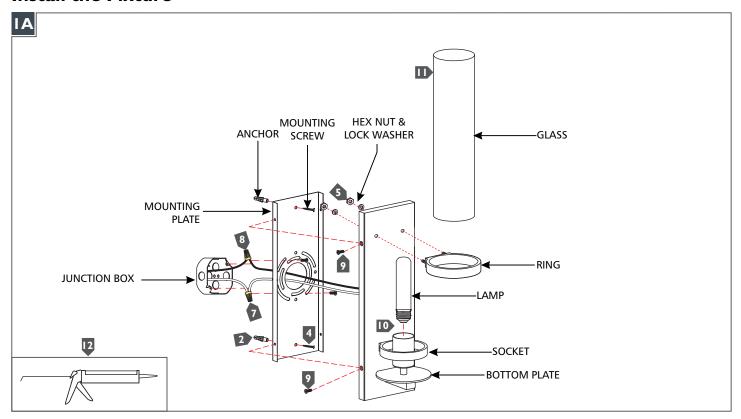

- Temporarily install the mounting plate to the junction box and mark the anchor hole locations through the mounting plate holes. Remove the mounting plate.
- 2 Drill appropriate sized holes at the marked locations and install the anchors.
- 3 Secure the mounting plate to the junction box.
- 4 Screw the anchor screws into the anchors.
- Install the ring onto the fixture base and secure in place with provided lock washers and hex nuts.
- Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire to the hot power line wire with a wire nut.
- 9 Mount the fixture base onto the mounting plate and secure it with the fixture screws.
- Screw the lamp into the socket. Refer to the label on the socket for Max Wattage Information.
- Align the glass to the ring and slide it carefully into the ring allowing it to rest on the bottom plate.
- For wet locations, caulk around the base of the fixture with waterproof construction sealant.