GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.


GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347


www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

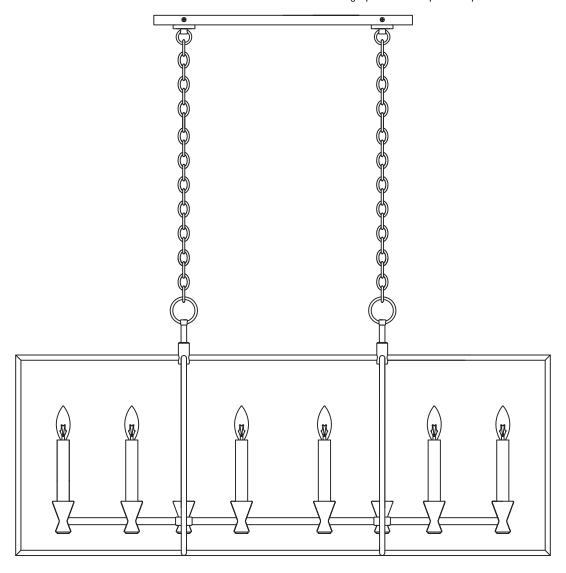

Install the Fixture

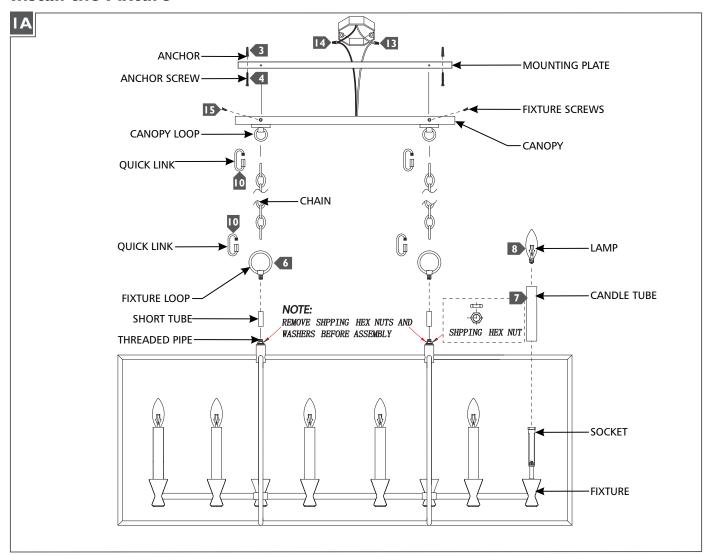

- Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor locations through the holes on the mounting plate, then remove the mounting plate.
- Install the anchors to the marked points.
- 4 Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- Remove the pre-installed hex nut and washer from the threaded pipe.
- Feed the fixture wires through the short stem and fixture loop, then screw the short stem to the threaded pipe and the fixture loop onto the short stem Repeat for the other side.
- Install the candle tubes by sliding them over the sockets.
- Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- Install a quick link onto the chain and fixture loop, then install another quick link to the other end of the chain and canopy loop. Repeat steps 9 and 10 for the other side.
- Weave the cord through the chain, canopy, and out of the electrical box. Trim the cord leaving enough to make electrical connections.
- [2] Connect the fixture to a suitable ground in accordance to local electrical codes.
- Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place using the fixture screws.