# **Richmond Wall**

## Nall

### CW1041, CW1042 1.0

### GENERATION LIGHTING

Wall

#### **GENERAL PRODUCT INFORMATION:**

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

#### **CAUTION - RISK OF FIRE**

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°c supply conductors.

#### GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347


#### www.generationlighting.com

© 2020 Generation Lighting. All rights reserved. The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

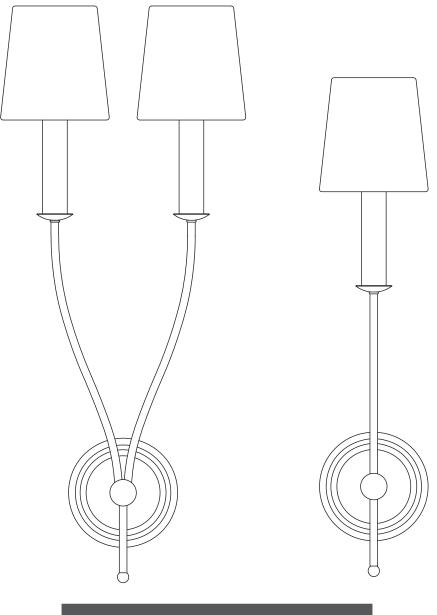

## SAVE THESE INSTRUCTIONS!

## Install the Fixture

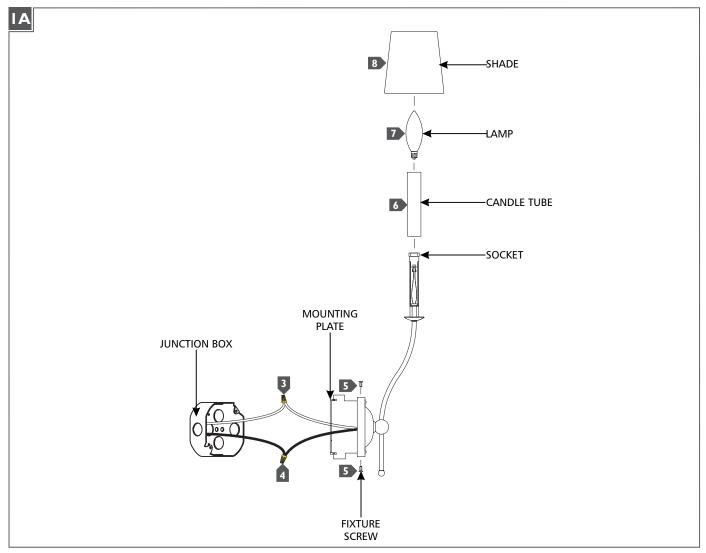

- **I** Secure the mounting plate to the junction box.
- 2 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire to the hot power line wire with a wire nut.
- **5** Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 6 Install the candle tubes by sliding them over the sockets.
- Screw the lamp(s) into the socket(s). Refer to the label on the lamp socket for Max Wattage information.
- 8 Install the shade by placing it over the lamp. Repeat for remaining shades.