

Beckett Wall

CW1071 | 1.0

GENERATION LIGHTING

Wall

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERATION LIGHTING


7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com


© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.

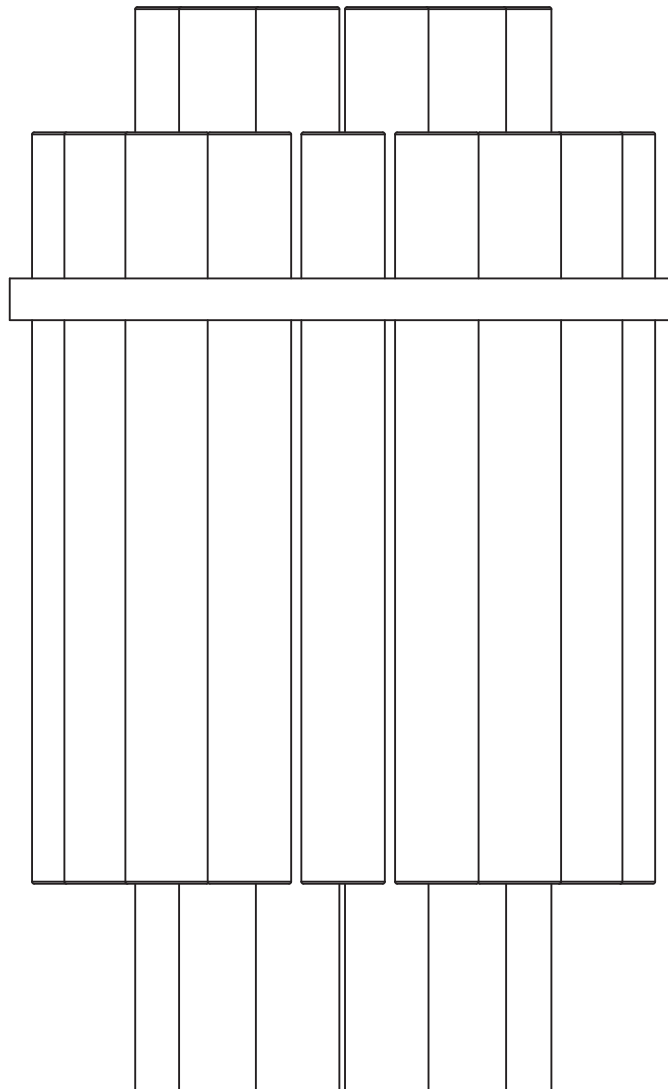

SAVE THESE INSTRUCTIONS!

Install the Fixture

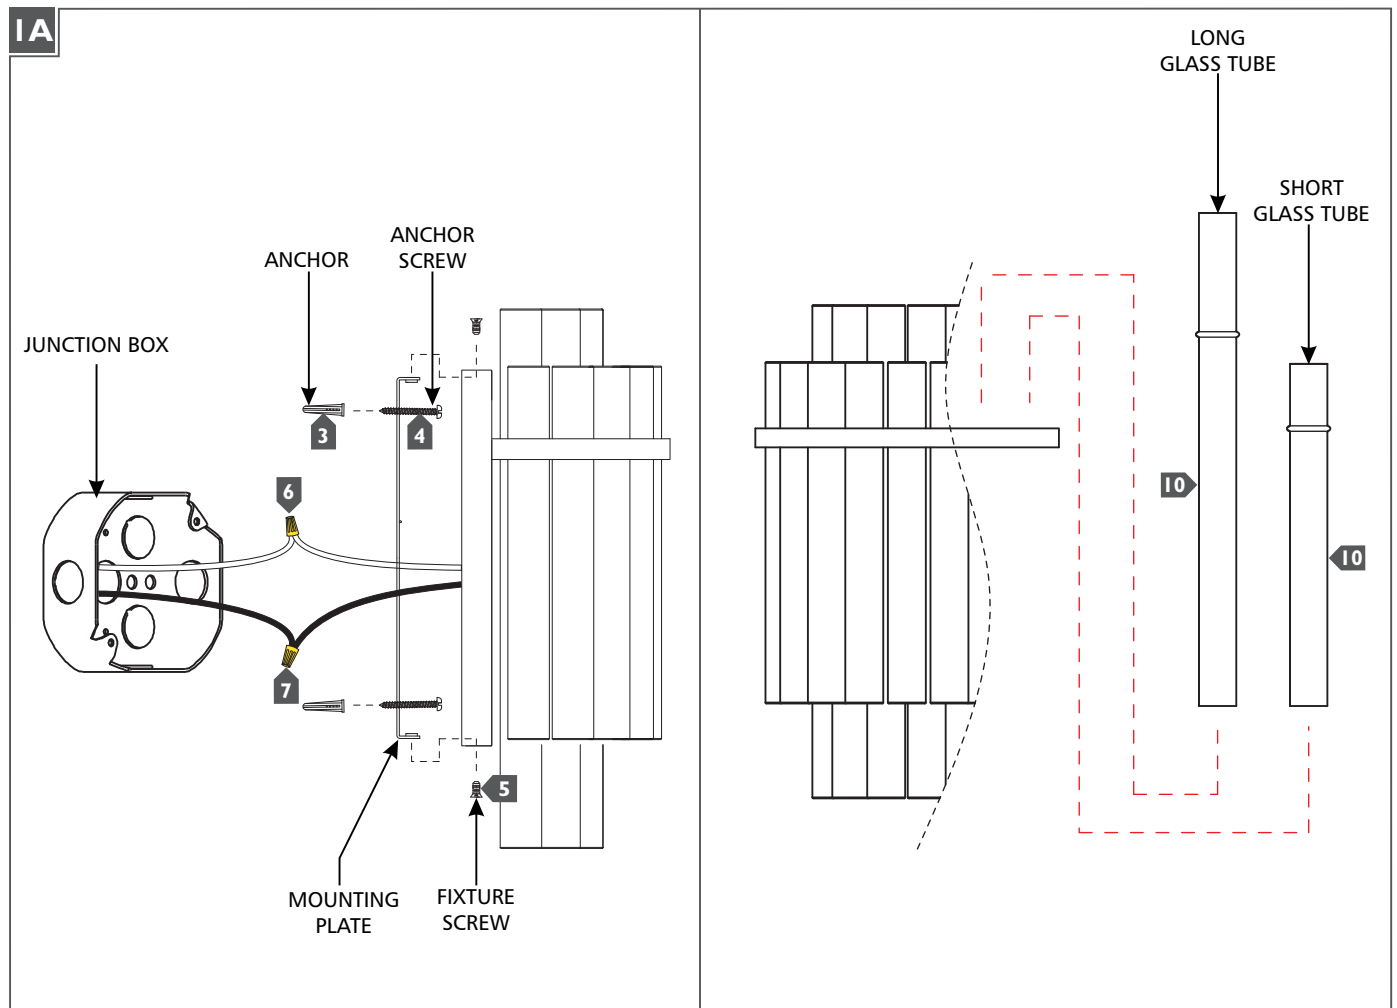

- 1 Temporarily install the mounting to the junction box.
- 2 Mark the anchor locations through the holes on the mounting plate. Remove the mounting plate.
- 3 Drill appropriate sized holes at the marked locations and install the anchors.
- 4 Secure the mounting plate to the junction box and screw the anchor screws into the anchors.
- 5 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 6 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 7 Connect the black fixture wire to the hot power line wire with a wire nut.
- 8 Properly place all wires and wire nut connections into the junction box/fixture base, mount the fixture onto the mounting plate, and secure it in place using the fixture screws.
- 9 Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 10 Install the long glass tubes around the inner part of the fixture frame, then install the short glass tubes around the outer part of the fixture frame.