junction boxes.

Pohl Outdoor Wall

GENERATION LIGHTING

GENERAL PRODUCT INFORMATION:

This product is safety listed for wet locations.

lamp manufacturer for additional information.

This instruction shows a typical installation.

These fixtures are intended to be installed utilizing NEC compliant

Incandescent version may be dimmed with a standard incandescent

dimmer. LED version may be dimmed with a LED dimmer. Consult

8531701, 8631702, 8731701, 8831702 1.0

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


Use minimum 90°c supply conductors.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347


www.visualcomfort.com

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification

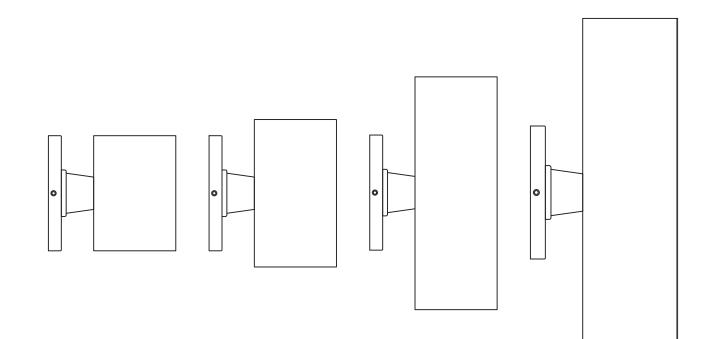

SAVE THESE INSTRUCTIONS!

Install the Fixture

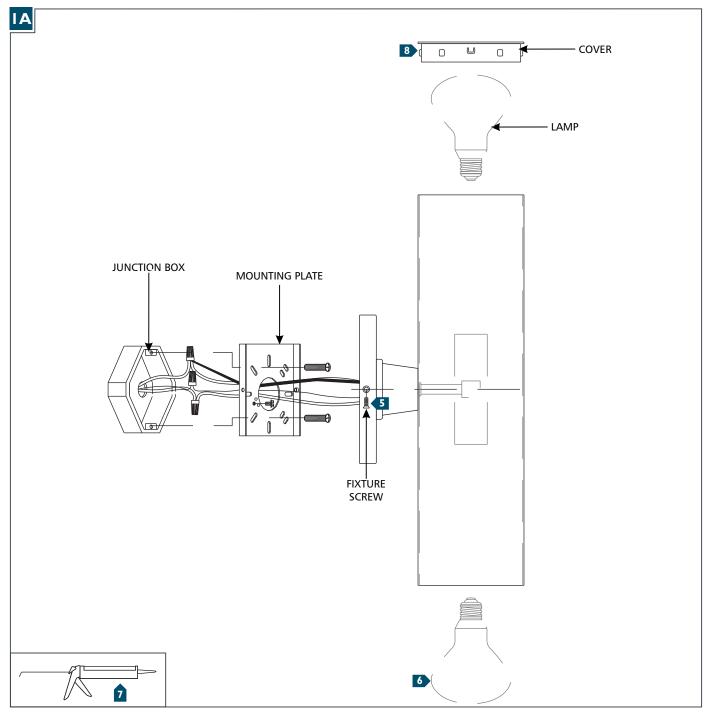

- Secure the mounting plate to the junction box.
- 2 Connect the fixture to a suitable ground in accordance to local electrical codes.
- 3 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 4 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 5 Neatly place all the wires into the junction box, place the fixture base onto the mounting studs, and secure it in place using the fixture screws.
- 6 Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.
- **7** For Wet Locations, caulk around the base of the fixture with waterproof construction sealant.
- 8 For Models 8631702 and 8831702 Only: Install the cover to the top of the fixture.