

The Aspen outdoor wall sconce creates an elegant elongated column of beautifully diffused light. The Aspen is available in four sizes (8", 15", 26", 36") to meet architectural scale; ideal for wayfinding and general outdoor illumination. The Aspen features energy-efficient, fully dimmable integrated LED lighting. Available in three finishes, Bronze, Charcoal, and Natural Brass and four sizes.

### Outstanding protection against the elements:

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized, frosted acrylic lensing
- IP65 Rated

### SPECIFICATIONS

DELIVERED LUMENS	1060
WATTS	38
VOLTAGE	Universal 120-277V, with integral transient 2.5kV surge protection (driver)
DIMMING	0-10, ELV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Wall
PERFORMANCE OPTIONS	In-Line Fuse / Surge Protector
CCT	2700K or 3000K
CRI	90+
COLOR BINNING	3 Step
BUG RATING	B0-U3-G1
DARK SKY	Non-compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2019 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; >60,000 Hours
WARRANTY*	5 Years
WEIGHT	7 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



ASPEN 26 shown in charcoal



ASPEN 26 shown in bronze




ASPEN 26 shown in natural brass

### ORDERING INFORMATION

PRODUCT	CRI / CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
<b>7000WASP</b>	<b>927</b> 90 CRI, 2700K <b>930</b> 90 CRI, 3000K	<b>26</b> 26"	<b>D</b> DIFFUSE	<b>Z</b> BRONZE <b>H</b> CHARCOAL <b>NB</b> NATURAL BRASS	<b>UNV</b> 120V-277V UNIVERSAL	<b>S</b> SYMMETRIC	NONE <b>LF</b> IN-LINE FUSE <b>SP</b> SURGE PROTECTION <b>LFSP</b> IN-LINE FUSE & SURGE PROTECTION

# ASPEN 26 WALL SCONCE




Aspen 26

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### ASPEN 26

Total Lumen Output: 1060  
 Total Power: 38  
 Luminaire Efficacy: 28  
 Color Temp: 3000K  
 CRI: 90  
 BUG Rating: B0-U3-G1

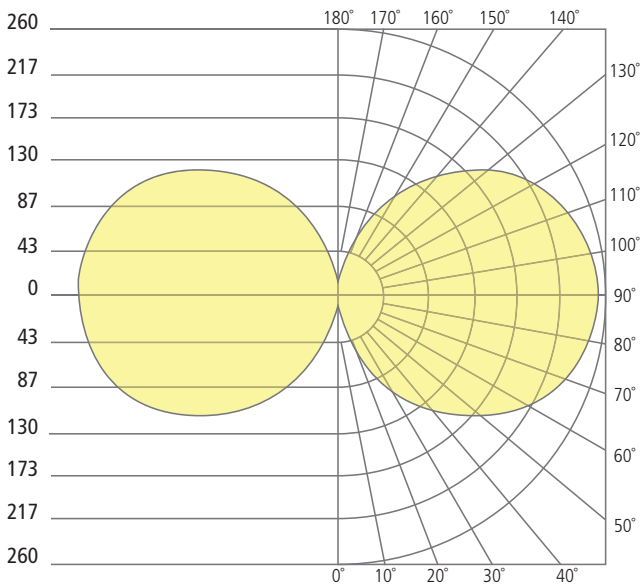

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---

