

MONORAIL 2" SQUARE DIRECT-END POWER FEED

PRODUCT FEATURES



LAMPING

The low-voltage leads from the remote transformer are connected to the canopy leads inside the junction box.

MonoRail 2" Square Direct-End Power Feed



MonoRail 2" Square Direct-End Power Feed

ORDERING INFORMATION

700MOP2CD SHAPE OR SIZE

2" SQUARE DIRECT END POWER FEED

FINISH

Z ANTIQUE BRONZE
S SATIN NICKEL

700MOP2CD _____

JOB NAME _____

NOTES _____




MONORAIL 2" SQUARE DIRECT-END POWER FEED



SPECIFICATIONS

PRIMARY MATERIAL	
SHADE MATERIAL	
NET WEIGHT	1.35 lbs
HEIGHT	1.3in
WIDTH	2.5in
LENGTH	2.5in
WET LISTED	
DAMP LISTED	
DRY LISTED	
GENERAL LISTING	ETL Listed
INCLUDES	

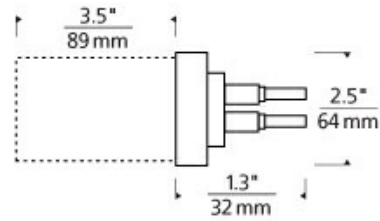

LAMPING SPECIFICATIONS

	LED LAMP	INTEGRATED LED	NON LED	NO LAMP
DELIVERED LUMENS				
WATTS				
MAX WATTAGE PER BULB				
INPUT VOLTAGE/ DIMMING TYPE				
CCT				
CRI				
LED LIFETIME				
L70				
AVERAGE BULB HOURS				
FIELD SERVICEABLE LED				
LAMP BASE				
LAMP SHAPE				
LAMP INCLUDED?				
WARRANTY**			1 Year	

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

	Integrated LED	Replacement LED Lamp	No Lamp *
This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8.			N/A
This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California.			N/A

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.

