

Champlain Chandelier

CC1146, CC1156 | 1.0

GENERATION LIGHTING

Chandelier

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

This instruction shows a typical installation.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°C supply conductors.

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077

800.969.3347

www.generationlighting.com

© 2020 Generation Lighting. All rights reserved.


The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.



SAVE THESE INSTRUCTIONS!

Install the Fixture

IA

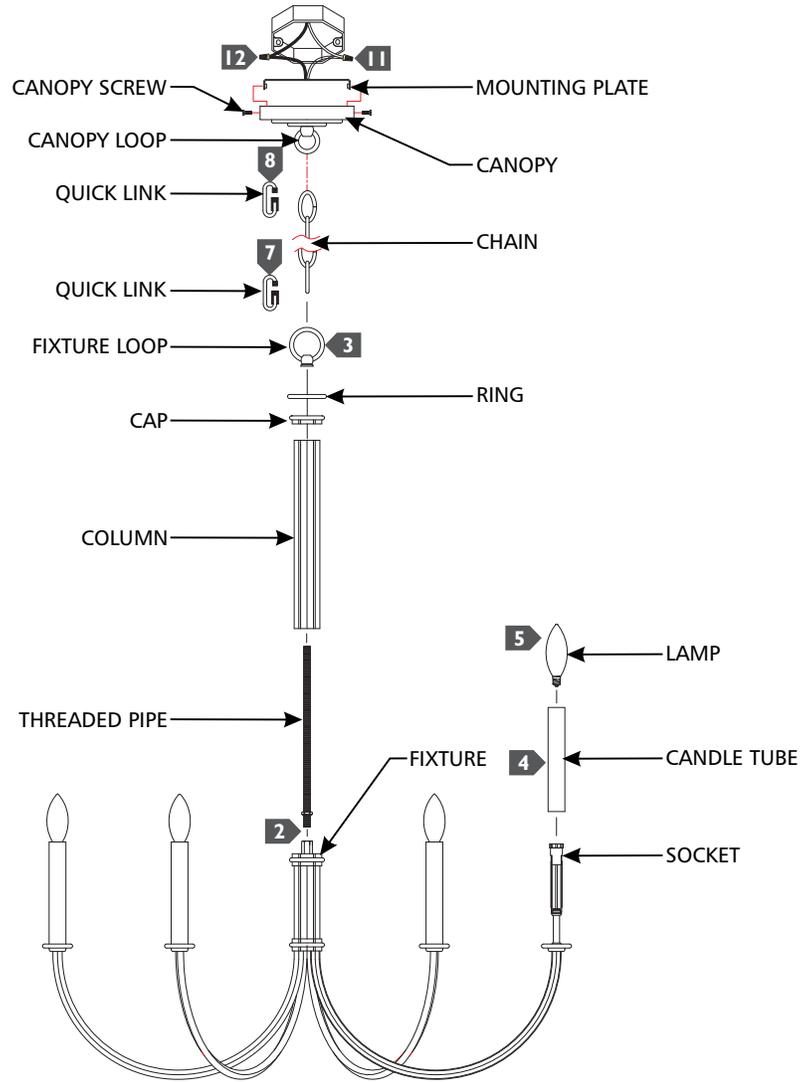

- 1** Secure the mounting plate to the junction box.
- 2** Feed the fixture wires through the threaded pipe, then screw the threaded pipe onto the fixture.
- 3** Feed the fixture wires through the column, cap, ring, and fixture loop (in that order), then slide them onto the threaded pipe and secure together by screwing the fixture loop onto the pipe.
- 4** Install the candle tubes by sliding them over the sockets.
- 5** Screw the lamps into the sockets. Refer to the label on the lamp socket for Max Wattage information.
- 6** Determine the wanted height of the fixture and remove a portion of the chain from the bottom by opening a link with pliers.
- 7** Install a quick link to bottom end of the chain, then secure the quick link onto the fixture loop.
- 8** Install a quick link onto the remaining end of the chain, then secure the quick link onto the canopy loop.
- 9** Weave the cord through the chain, canopy, and out of the junction box. Trim the cord leaving enough to make electrical connections.
- 10** Connect the fixture to a suitable ground in accordance to local electrical codes.
- 11** Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- 12** Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- 13** Neatly place all the wires into the junction box, place the canopy onto the mounting plate, and secure it in place by using the canopy screws.