Asher Large Flush Mount

VISUAL COMFORT & CO.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for damp locations.

Incandescent version may be dimmed with a standard incandescent dimmer. LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.
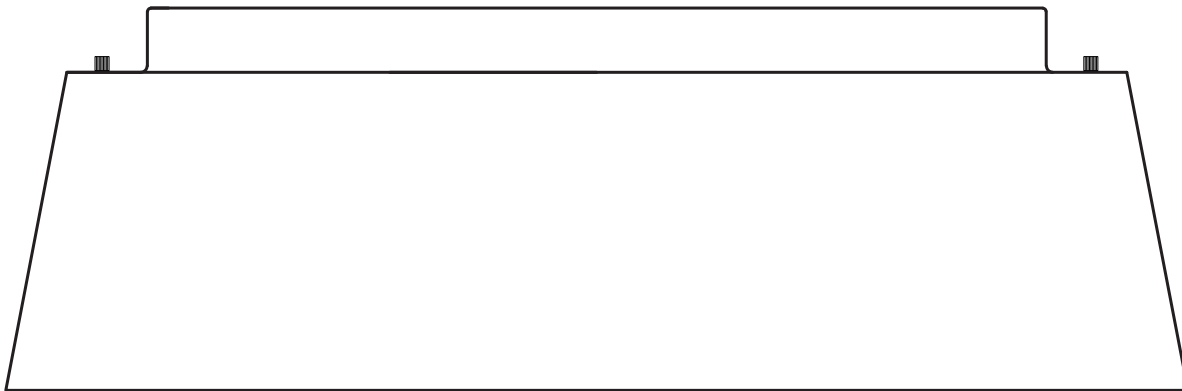
This instruction shows a typical installation.

CAUTION - RISK OF FIRE
This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
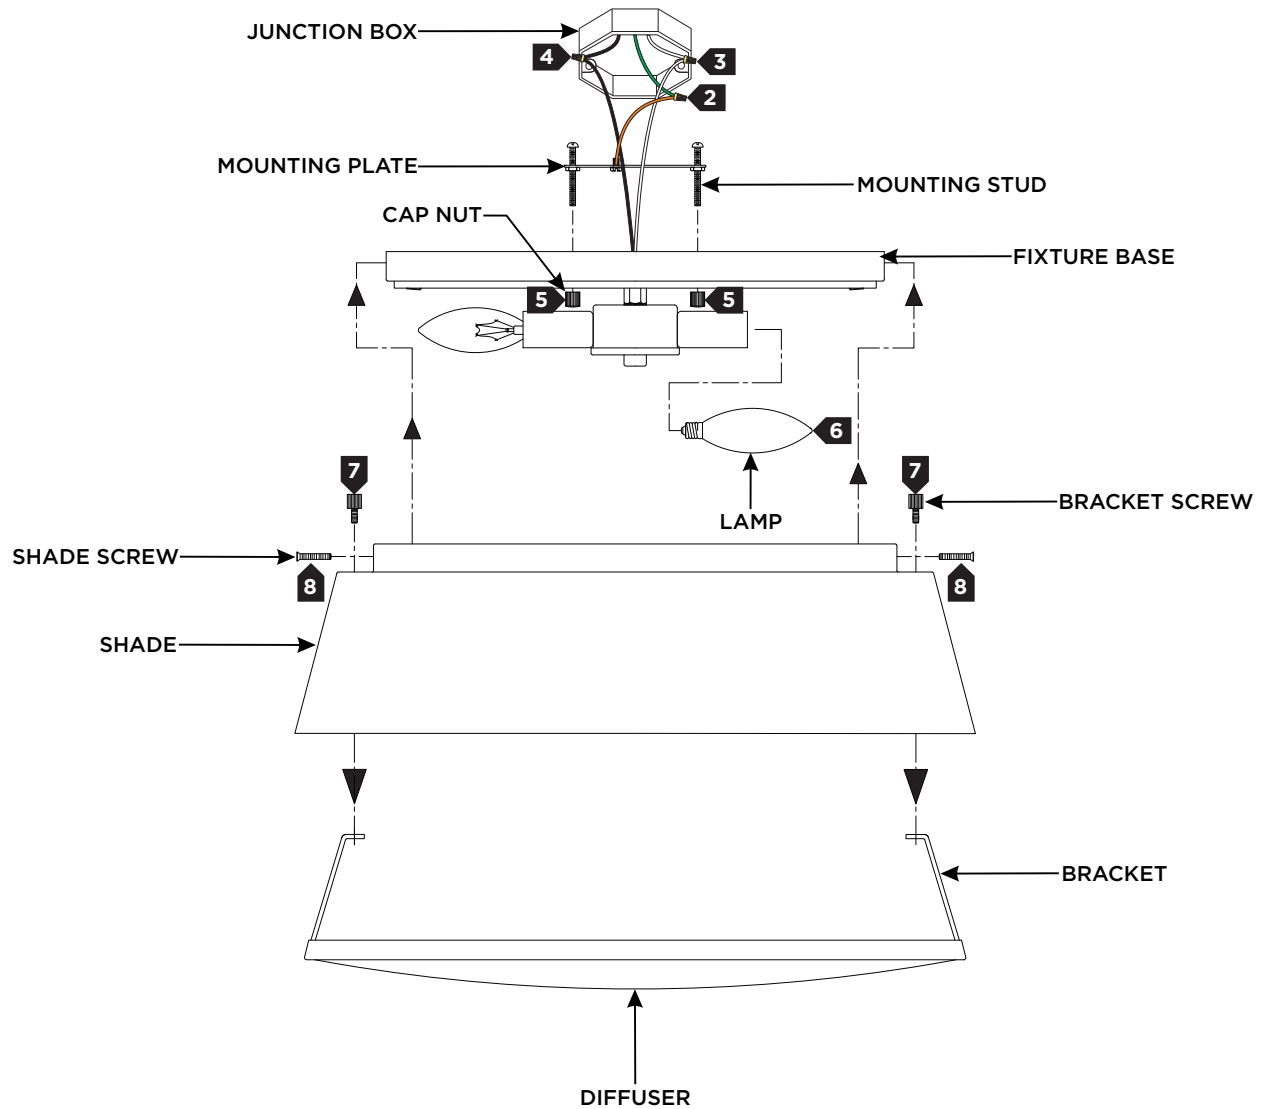Use minimum 90°C supply conductors.

SAVE THESE INSTRUCTIONS!

VISUAL COMFORT & CO.

Install the Fixture

1A

JUNCTION BOX

4 **3**

2

MOUNTING PLATE

MOUNTING STUD

CAP NUT

FIXTURE BASE

5 **5**

6

LAMP

7 **7**

BRACKET SCREW

SHADE SCREW

8 **8**

SHADE

BRACKET

DIFFUSER

1 Secure the mounting plate to the junction box.

2 Connect the fixture to a suitable ground in accordance with local electrical codes.

3 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.

4 Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.

5 Neatly tuck the wiring into the junction box, place the fixture base onto the mounting studs, and secure it in place by screwing the cap nuts onto the studs.

6 Screw the lamps into the sockets. Refer to the label on the socket for Max Wattage Information.

7 Insert the diffuser into the shade, align the brackets with the holes on the top of the shade, and secure them together using the bracket screws. (**NOTE:** To prevent damage to the glass, do not overtighten the screws).

8 Align the shade with the slots on the fixture base, then secure them together using the shade screws.