GENERATION LIGHTING

Vanity

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.


This product is safety listed for damp locations.

Incandescent lamps may be dimmed with a standard incandescent dimmer. LED lamps may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.

CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

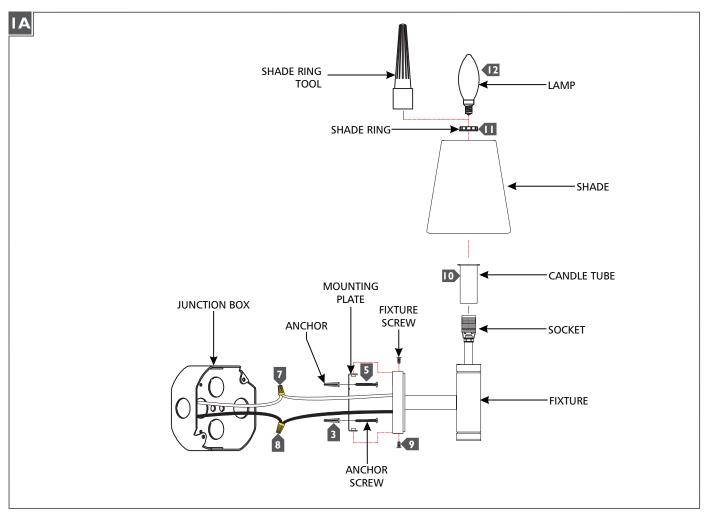

- Temporarily install the mounting plate to the junction box.
- 2 Mark the anchor hole locations through the mounting plate, then remove the mounting plate.
- 3 Drill appropriate sized holes and install the anchors.
- 4 Secure the mounting plate to the junction box.
- 5 Screw the anchor screws into the anchors.
- 6 Connect the fixture ground wire to a suitable ground in accordance to local electrical codes.
- 7 Connect the white fixture wire to the neutral power line wire with a wire nut.
- 8 Connect the black fixture wire to the hot power line wire with a wire nut.
- 9 Mount the fixture onto the mounting plate and secure it in place with the fixture screws.
- Install the candle tube(s) by placing it over the socket(s).
- Install the shade(s) by placing it over the socket(s) then use the shade ring tool to tighten the shade ring onto the socket.
- Screw the lamp(s) into the socket(s). Refer to the label on the socket for Max Wattage Information.

SAVETHESE INSTRUCTIONS!

GENERATION LIGHTING

7400 Linder Ave, Skokie, IL 160077 800.969.3347

www.generationlighting.com

© 2019 Generation Lighting. All rights reserved.

The "Generation Lighting" graphic is a registered trademark of Generation Lighting. Generation Lighting reserves the right to change specifications for product improvements without notification.